



National Law University and Judicial Academy, Assam

(Established by Assam Act No. XXV of 2009)

No.: NLUJAA/ADMIN/F/CAMPUS-DEVT./2023/23/1112

Date: 26-06-2023

NOTICE INVITING QUOTATION

Scaled quotations are hereby invited affixed with non-refundable Court Fee Stamp of Rs. 8.25 (Rupees Eight and Twenty-Five paise) only from reputed PWD Registered Firms/Vendor/Contractors for **Construction of Vermicomposting Pit along with platform and rain shed** at National Law University and Judicial Academy, Assam as per the terms & conditions given below, which will be received at the office of the Registrar, NLUJA, Assam during office hours up to **01:30 PM** on or before **10-07-2023** and will be opened on the same day at **02:00 PM**. The Firms or their authorized representative may remain present at the time of opening of the quotations.

Sl. No.	Items Description	Quantity	Remarks
1	Construction of Vermicomposting Pit along with platform and rain shed	01 no.	As per attached drawing and BOQ

Scope of work:

1. Construction of Vermicomposting Pit along with platform and rain shed as per attached drawing and BOQ.

Terms and Conditions:

1. The rates should be quoted against the work and should be inclusive of all GST/taxes applicable at any point of time.
2. The sealed envelope should bear the following superscription "The Registrar, National Law University and Judicial Academy, Assam".
3. The Firm will have to deposit Earnest Money of **Rs. 5000/-** each in the form of Demand Draft in favour of "Registrar, National Law University and Judicial Academy, Assam".
4. The undersigned reserves the right to accept or reject any tender without assigning any reason thereof.
5. Any deviation from terms and conditions shall invite cancellation of Quotation/Tender/Bills etc. and forfeiture of security deposit.
6. **Each firm must have PWD registration, GST registration, Income Tax Clearance certificate, PAN Card. A Self-attested copy of the above mentioned documents must be submitted along with the Quotation.**
7. In case there is no approved rate of any item required for the aforesaid construction work the supplier will have to supply the same at reasonable price but not more than the Maximum Retail Price/market price, whichever is less.
8. In case lowest rate is quoted by one firm for some items and by other firms for other items, then the firms will have to give their willingness/consent letter to supply any or all of the materials as above as per approved rates of the undersigned. If the lowest quoted rate is higher than the MRP/market price, then payment will be made as per the MRP/market price.
9. Any firm/supplier indulging in any malpractice or adopting any unfair means will be barred from any work with the University.
10. Past records of the firms/suppliers/contractors will be duly considered while awarding the work.
11. Any other condition deemed to be justified, fit and proper at point of time.

Memo No: NLUJAA/ADMIN/F/CAMPUS-DEVT./2023/23/1113-1116

Copy to:

1. Finance officer I/C for information.
2. System Administrator, NLUJA, Assam with a request to upload in the University website.
3. P.S. to VC for kind appraisal of the Hon'ble Vice-Chancellor
4. Notice Board

Registrar

Date: 26-06-2023

Registrar

(To be printed in letter Head of Contractor/Firm/Vendors)

Price Bid for Construction of Vermicomposting Pit along with
platform and rain shed


Sl. No.	Items Description	Quantity	Rate (Incl. GST)	Amount (Incl. GST)
1	Construction of Vermicomposting Pit along with platform and rain shed	01 No.		

Seal & Sign of Contractor/Firm/Vendor


Name Of Work
ESTIMATE FOR COMPOSTER ALONG WITH PLATFORM AND RAIN SHED
AT
NATIONAL LAW UNIVERSITY AND JUDICIAL ACADEMY AMINGAON, ASSAM

BILL OF QUANTITY


SL.No.	SOR REFERENCE (DSR 2021)	Item description	Unit	Quantity	Rate	Amount in Rs.
1	11.2	Dry brick on edge flooring in required pattern with bricks of class designation 7.5 on a bed of 12 mm mud mortar, including filling joints with Jamuna sand, with common burnt clay non modular bricks.	Sq.m	13.50		
2	6.3	Brick work with common burnt clay machine moulded perforated bricks of class designation 12.5 conforming to IS: 2222 in superstructure above plinth level up to floor five level in cement mortar 1:6 (1 cement : 6 coarse sand) :				
	6.3.1	With F.P.S.(non modular) bricks	Cum	3.67		
3	4.1	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :				
	4.1.5	1:3:6 (1 Cement : 3 coarse sand (zone-III) derived from natural sources : 6 graded stone aggregate 20 mm nominal size derived from natural	Cum	2.70		
4	13.2	15 mm cement plaster on the rough side of single or half brick wall of				
	13.2.1	1:4 (1 cement: 4 fine sand)	Sqm	21.17		
5	10.16	Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete.				
5(i)	10.16.1	Hot finished welded type tubes	Kg	226.41		
6	13.47	Finishing walls with Premium Acrylic Smooth exterior paint with Silicone additives of required shade:				
6(i)	13.47.1	New work (Two or more coats applied @ 1.43 ltr/10 sqm over and including priming coat of exterior primer applied @ 2.20 kg/10 sqm)	Sqm	21.17		
7	13.80	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	Sqm	21.17		
8	12.50	Providing and fixing pre-coated galvanised iron profile sheets (size, shape and pitch of corrugation as approved by Engineer in charge) 0.50 mm (+ 0.05 %) total coated thickness with zinc coating 120 grams per sqm as per IS: 277, in 240 mpa steel grade, 5-7 microns epoxy primer on both side of the sheet and polyester top coat 15-18 microns. Sheet should have protective guard film of 25 microns minimum to avoid scratches during transportation and should be supplied in single length upto 12 metre or as desired by Engineer in charge. The sheet shall be fixed using self drilling /self tapping screws of size (5.5x 55 mm) with EPDM seal, complete upto any pitch in horizontal/ vertical or curved surfaces, excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required.	Sqm	30.79		
					Total Rs.	0.00

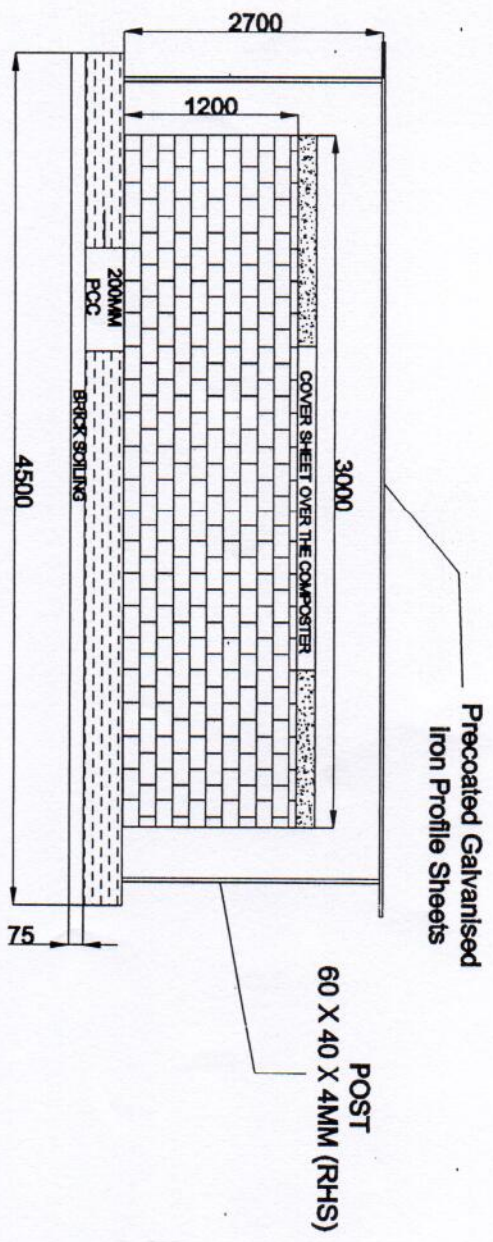


FRONT ELEVATION

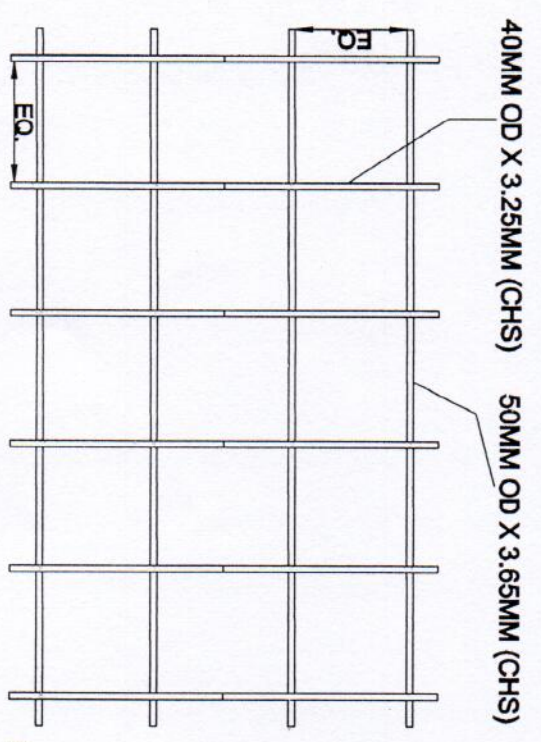

TRUSS

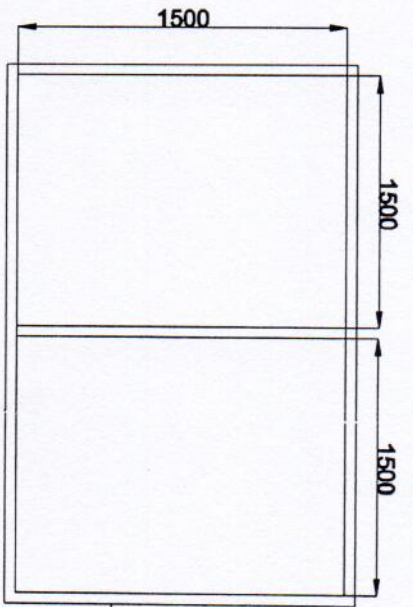

COMPOSTER C/S TOP VIEW

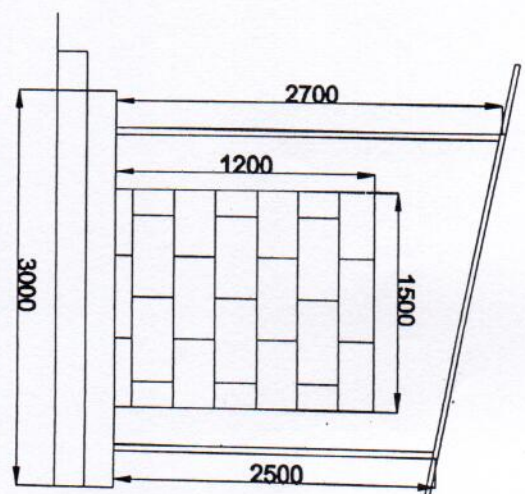

RIGHT SIDE ELEVATION

10" BRICK WALL
ALL AROUND

NOTE :

1. ALL DIMENSIONS ARE IN MM
2. ALL MS MATERIAL SHOULD BEAR ISI MARK
3. COLOUR OF ROOF SHEET- GREEN
4. PAINT COLOUR: PREFERABLY IVORY

<p>NATIONAL LAW UNIVERSITY AND JUDICIAL ACADEMY AMINGAON, ASSAM</p>	
<p>SCALE : NOT TO SCALE</p>	<p>DATE :</p>
<p>COMPOSTER DETAILS</p>	<p>SECTION AND ELEVATION DETAILS OF COMPOSTER ALONG WITH PLATFORM AND RAIN CURB</p>
<p>Asstt. Engineer P.W.D. Jalukant & Gornadi West Terthor Building Division, Jalukant,</p>	